

F160

FRP PIT



**DEMAGLENKO AMERICA
EASTERN OFFICE**
2 Whitney Road, Unit 1
US - Concord, NH 03301
Tel.: +1 603 267 7840


**DEMAGLENKO AMERICA
WESTERN OFFICE**
2746 Seeber Drive
US - Grand Junction, CO 81506
Tel.: +1 970 241 4442

sales@demaclenko.com | demaclenko.com



Example of configuration: F160 PREMIUM with full equipment

- 01 PRESSURE PIPE
- 02 AIR PIPE (PE)
- 03 POWER CABLE
- 04 DATA CABLE IN CABLE CONDUIT
- 05 GROUND WIRE WITH CROSS CONNECTOR
- 06 TAPPING SLEEVE FOR AIR PIPE
- 07 WELDED SLEEVE JOINT (PE)
- 08 BRANCHING OF THE WATER PIPELINE
- 09 STUB FOR COMPRESSED AIR (PE)
- 10 SPECIAL HYDRAULIC HOSE WITH PE COATING
- 11 DLE ELECTRIC EQUIPMENT
- 12 RAILS SYSTEM FOR LOOP THROUGH VARIANT
- 13 PIT HEATING
- 14 HYDROSYSTEM
- 15 BALL VALVE FOR WATER LINE
- 16 AUTOMATIC AIR VALVE WITH BALL VALVE FOR COMPRESSED AIR SUPPLY
- 17 DRAINAGE PIPE

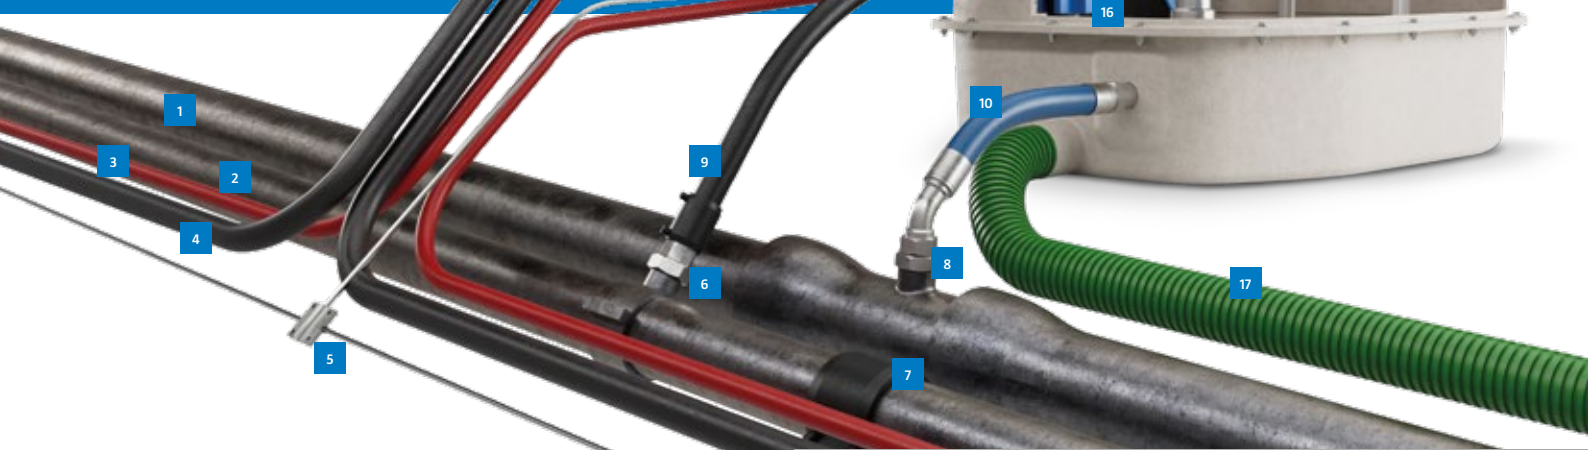

F160 STANDARD

CLEAR HEIGHT	135 cm / 4.4 ft
HEIGHT	145 cm / 4.8 ft
WIDTH	140 cm / 4.6 ft
LENGTH	170 cm / 5.6 ft
WEIGHT*	200 kg / 441 lbs
PIT HEATING	100 W

*Pit only



FRP pit F160

- > Pit made of highly resistant fiberglass reinforced plastic (FRP) - suitable for any terrain
- > Cleanest solution on the market, very low weight
- > Numerous configuration options - equipment according to requirements and needs
- > Quick and easy installation, as connections/ openings for water, air, power and control lines are already pre-positioned at ideal height
- > Easy access through the large hatch

THERE ARE 2 MODELS AVAILABLE:

F160 STANDARD

- > Pit without floor - optimal for long distance transport, can be stacked inside of shipping containers saving space and money. Suitable for lances, mobile machines and towers up to 2 m / 6.6 ft.

F160 PREMIUM

- > Pit with floor - suitable for lances, mobile machines, towers and inclined elevators up to 4 m / 13.2 ft (no additional reinforcement required).

F160 PREMIUM

CLEAR HEIGHT	160 cm / 5.2 ft
HEIGHT	180 cm / 5.9 ft
WIDTH	140 cm / 4.6 ft
LENGTH	170 cm / 5.6 ft
WEIGHT*	250 kg / 551 lbs
PIT HEATING	100 W

*Pit only

